


## Quick Reference Guide: AIM Firmware Update with Cyclone Pro

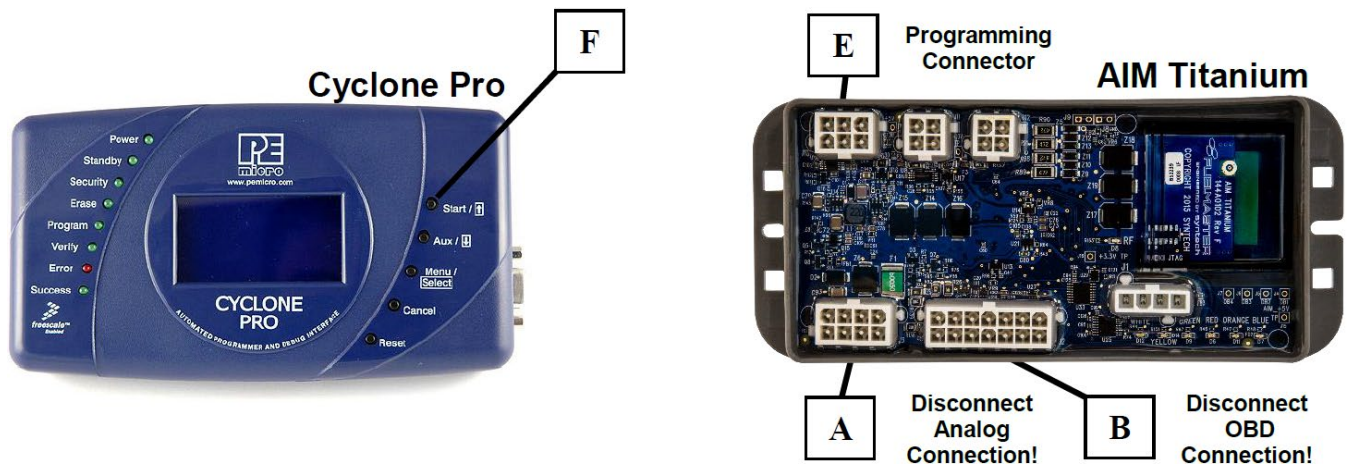


1. Disconnect the OBD [B] and analog cable [A] from the AIM.

**WARNING** The OBD and analog connections to the AIM module must be disconnected before programming the AIM. The Cyclone Pro programmer and AIM module will be damaged if programming is attempted while the AIM is connected to an OBD or analog connection.

2. Connect the power cable to the Cyclone's power receptacle [C]. The receptacle is located on the bottom side of the unit, directly underneath the "CYCLONE PRO" text. The Cyclone screen will turn on and a green "STANDBY" light will illuminate.



3. Connect one end of the programming cable to the connector on the left side of the Cyclone [D]. The cable has a green dot to signify the top of the cable. Connect the other end of the cable into the AIM [E].

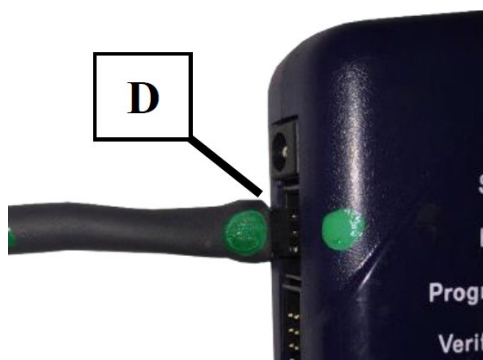

4. Press the “START / ↑” button [F]. The indicator lights to the left of the display will toggle as the Cyclone erases the old firmware, loads the new file, verifies the file transfer and finally illuminates the green “SUCCESS” light. If the process does not complete within 20 seconds, an error has occurred. Press the “RESET” button and retry. If the AIM continues to fail, disconnect the programming cable and replace the AIM.



5. Disconnect the programming cable and reconnect the AIM to the vehicle once the firmware update is complete.

**TIP**

If any questions arise, contact Syntech Systems, Inc.'s Customer Satisfaction Center (CSC) at 1-800-888-9136, ext. 2, or email [support@myfuelmaster.com](mailto:support@myfuelmaster.com).